

SP602 - PALLET LABELLING (2 stops)

The SP602 is a system for automatic 2-side pallet labelling - requiring two stops of the pallet - when labelled on two adjacent sides.


With the SP602 system we connect you to the world of Zebra® based printers and software. The usage of Zebra Pax III OEM Print Engine ensures you a fast and reliable solution!




SP602 in left hand version.

The SP602 includes:

- 6" Thermal Transfer Printer
- 2-side pallet applicator
- Cabinet with three doors
- Warning - low level labels
- Warning - low level ribbon
- Flashlight/beacon
- Check scanner
- Air regulator, soft start valve
- Harting Industrial Connectors

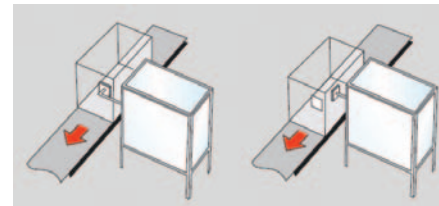

Labelling procedure.

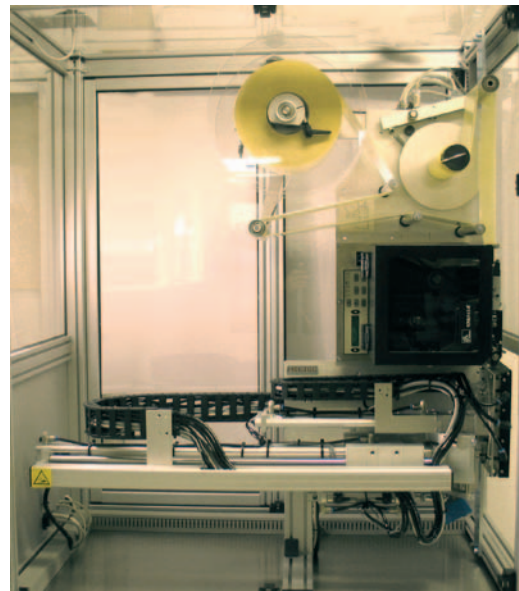

TECHNICAL DATA

Type of applicator:	Tamp/Tamp-Blow. The blow can be switched off
Tamp size:	150 x 210 mm
Print speed:	Up to 300 mm/sec
Resolution:	8 or 12 dots/mm 200/300 DPI
Interface:	2 x RS232, 1 x RS485, 1 x USB 2.0 (Ethernet optional)
Cabinet dimensions:	1050 x 680 mm (l x w) The total height is dependent of label position and conveyor height.

FAST FACTS

Printer:	6" Thermal Transfer
Application:	One label is applied on the front (or back) and one on the side of a stationary pallet (2 Stops required)
Label size:	A5 portrait (150x210 mm) preferred
Distance:	470 mm from the cabinet to the applicator pad

Available in both right- and left hand version!

ACCESSORIES

CABINET	<ul style="list-style-type: none">• Emergency stop• Door interlock switches• Fan / heating / climate control• Electrical height adjustment• Pneumatic hatch / Sealed doors• PC-Module
OTHER	<ul style="list-style-type: none">• Ethernet interface• Label Check in Applicator Pad