



TF100 - FRONT OR BACK SIDE LABELLING

TF100 is a Print&Apply solution especially designed for flexible and reliable Front or Back side labelling - either working from over or beside the conveyor. Can in some applications also be used for side labelling.

The TF100 has the reliable, robust and easy to use design - as seen on all the Mectec family machines. It is proven to give you 24 hours reliable labelling for many years to come!

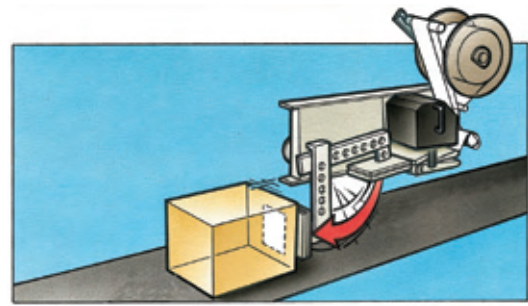

Box and parcel labelling. Applies on moving products!

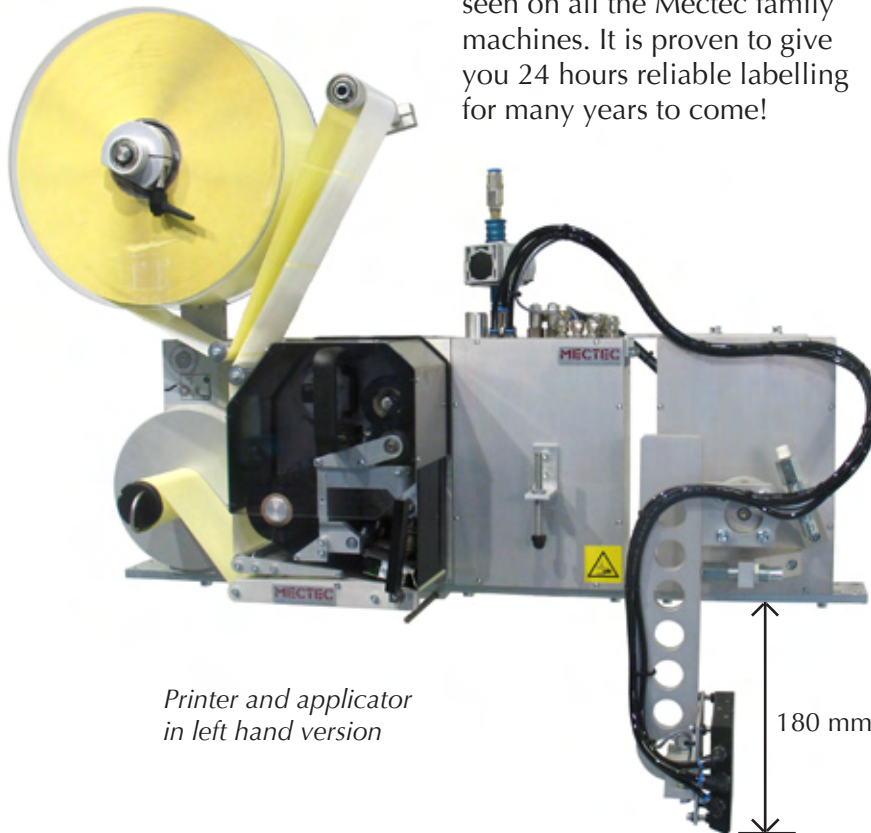

Printer and applicator in left hand version

180 mm



Handheld terminal TG300 (optional)



Printer Control Unit PCU III

TECHNICAL DATA

Type of applicator:	Tamp/Tamp-Blow. The blow can be switched off
Tamp size:	110 x 110 mm
Print speed:	Up to 300 mm/sec
Resolution:	8 or 12 dots/mm 200/300 DPI
Interface:	2 x RS232, 1 x RS485, 1 x USB 2.0 (Ethernet optional)
Overall dimensions:	823 x 614 x 280 mm (l x h x w) - P & A 406 x 265 x 128 mm (l x h x w) - PCU III
Controller functions:	On-Line and Stand Alone operation, 2 x 20 characters display, 9 keys, 11 status LEDs. 24 Inputs, 26 Outputs. Real time clock, counters, date offsets and much more...!

FAST FACTS

Printer:	4" Thermal Transfer
Application:	Front or back side labelling Stationary or moving object
Label size:	40 x 40 - 105 x 105 mm
Distance:	180 mm (longer optional)

Available in both right- and left hand version!

ACCESSORIES

- TG300 - Handheld terminal
- Warning Low Level Media
- Cabinets
- Label Check in the Applicator Pad
- Flashlight/Beacon
- Check scanner
- Fixed or adjustable stands