


TFS150 - Dual Action Tamp

TFS150-Dual Action tamp is a Print & Apply solution especially designed for flexible and reliable Front and Side labelling - working from beside the conveyor. The Dual action tamp applies two separate labels with the same applicator and pad.

The TFS150 has the reliable, robust and easy to use design - as seen on all the Mectec family machines. It is proven to give you 24 hours reliable labelling for many years to come!

Printer and applicator in left hand version

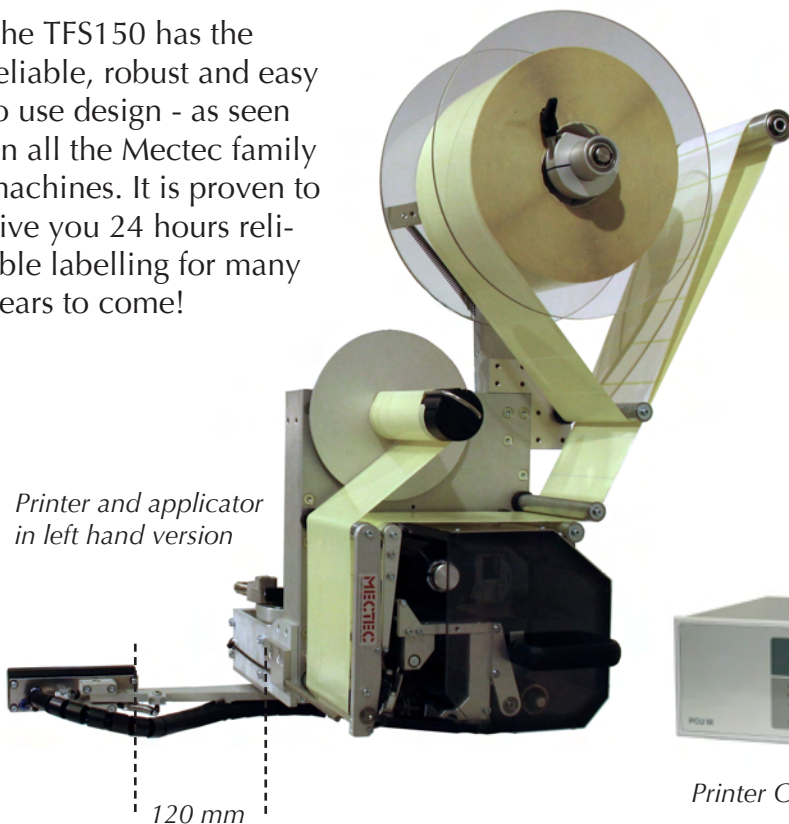

Printer Control Unit PCU III



Handheld terminal TG300 (optional)

TECHNICAL DATA

Type of applicator:	Tamp/Tamp-Blow. The blow can be switched off
Tamp size:	150 x 45 mm
Print speed:	Up to 300 mm/sec
Resolution:	8 or 12 dots/mm 200/300 DPI
Interface:	2 x RS232, 1 x USB 2.0 (RS485 and Ethernet optional)
Overall dimensions:	455 x 540 x 630 mm (l x h x w) - P & A 406 x 265 x 128 mm (l x h x w) - PCU III
Controller functions:	On-Line and Stand Alone operation, 2 x 20 characters display, 9 keys, 11 status LEDs. 24 Inputs, 26 Outputs. Real time clock, counters, date offsets and much more...!

FAST FACTS

Printer:	6" Thermal Transfer
Application:	Front and side labelling on moving object
Label size:	100 x 30 - 160 x 45 mm
Distance:	120 mm

Available in both right- and left hand version!

ACCESSORIES

- TG300 - Handheld terminal
- Warning Low Level Media
- Cabinets
- Label Check in the Applicator Pad
- Flashlight/Beacon
- Check scanner
- Fixed or adjustable stands